


1. Die-cut from desired material. Two brads will be needed to assemble the sides and attach the handle.



2. Adhere the two body pieces together so that edge bottom of each aligns with the tab folds as shown.

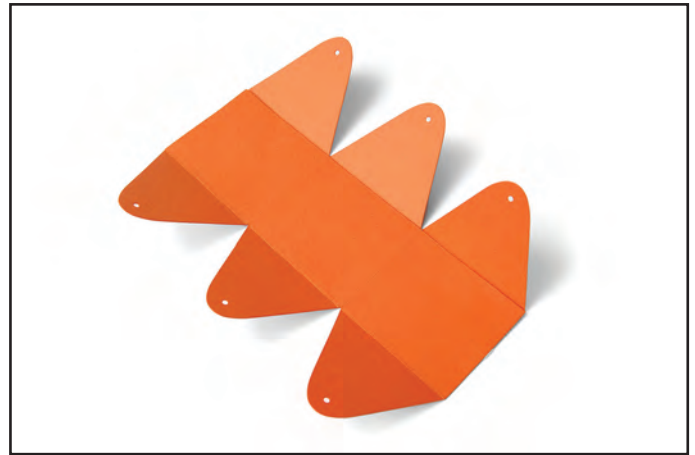

3. Fold the ends up so that the holes of the three flaps on each side align. Secure the sides by inserting a brad through one end of the handle, then inserting the brad through the sides as shown.